



NON-SLIP Stripology XL Ruler

Reduce your cutting time by 75%! The Stripology XL Ruler is a taller, multi-purpose tool for cutting strips, squares, rectangles, diamonds, and triangles. Squaring up pieced blocks up to 12½" is a breeze!

Designed by Gudrun Erla

#CGRGE1XL

Made in USA



SEE A DEMO
SCAN WITH ANY
QR READER



Creative Grids® USA, Inc
400 W. Dussel Dr. Ste B
Maumee, OH 43537-1636
www.creativegridsUSA.com

Creative Grids® UK, Ltd.
Unit 23A Pate Road
Leicester Road Industrial Estate
Melton Mowbray
Leicestershire, LE13 0RG England
www.creativegrids.com



Creative Grids is covered by U.S. Trademark Registration No. 2,796,615

NON-SLIP Stripology XL Ruler

When positioning the Stripology XL Ruler, be sure to lift it with both hands to prevent twisting and bending the acrylic to avoid breakage.


Cutting Yardage Into Strips

Fold your yardage piece in half lengthwise so that it is folded into four layers. Turn it so that the fold is closest to you and the selvages and bolt fold are together (bolt fold over the selvages). Lay the Stripology XL ruler on top and align the bottom fold with the "0" line on the ruler. Make sure that the raw edge of the fabric is to the left of the "0" slit. Cut your strips by dropping your rotary cutter into the teardrop at the bottom of the slits closest to you and cut upwards to the end of the slit.

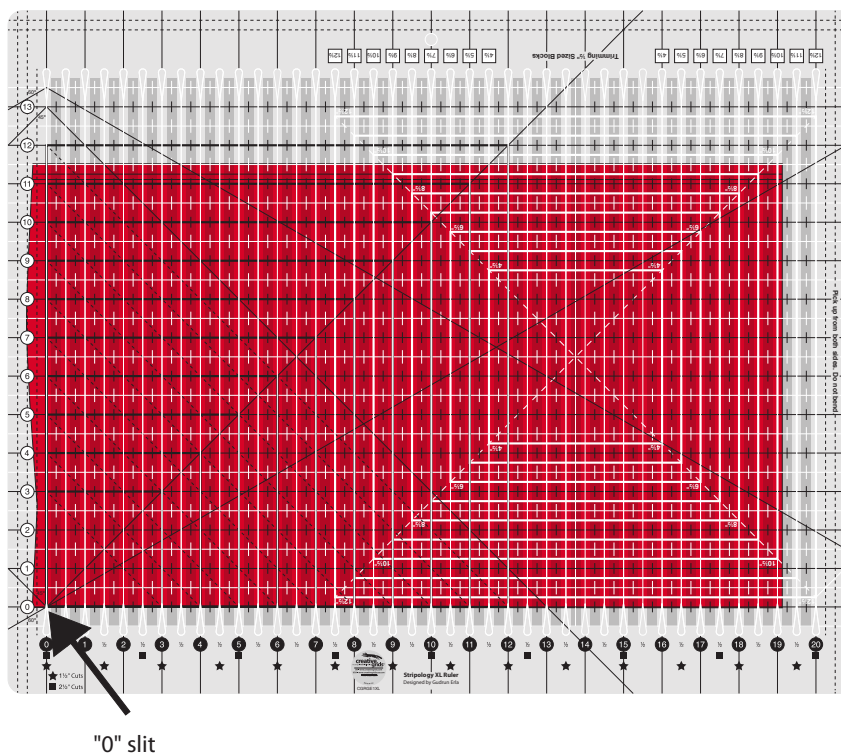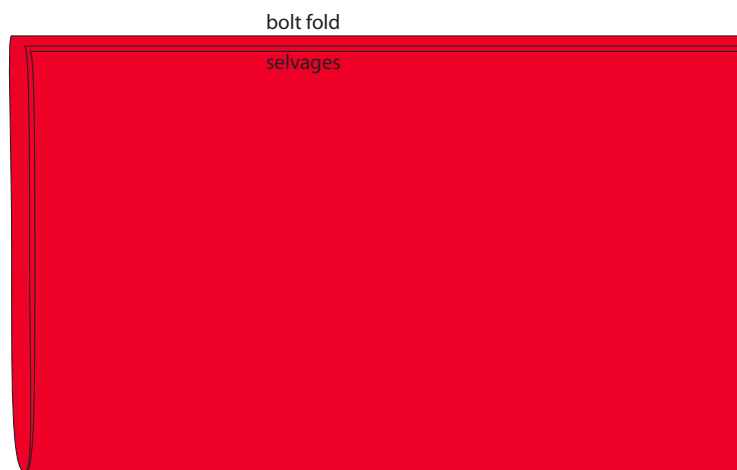

Strip Widths

To make the cutting even faster for you we have emphasized the most popular strip cuts. 1-1/2" cuts are marked with a star ★ and 2-1/2" cuts are marked with a square ■ below the slit you need to cut through. That way you can just look for that instead of doing any math.

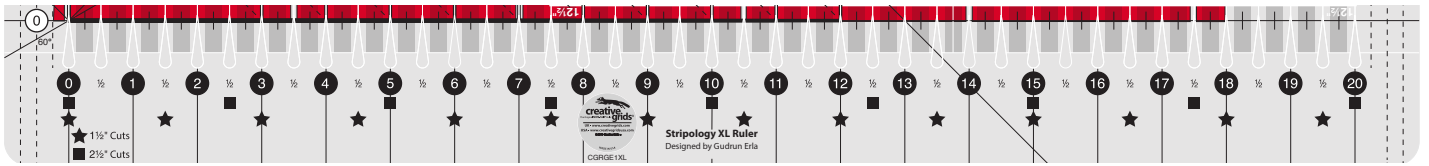

Cutting In 1/4" Increments

The Stripology ruler is not limited to cutting in 1/2" increments even though the slits are 1/2" apart. When you want to cut in 1/4" increments, follow the guide below. You will make your first cuts through the slits indicated (Fig. A). Then remove the squared up piece of fabric on the left of the "0" slit (Fig. B), slide the ruler to the right and line the edge of the first cut with the 1/4" dotted line on the left of the "0" slit (Fig. C). Then make your second cuts through the slits indicated in the chart below. Cutting 1-3/4" strips is shown.

Strip Size	First cuts	Move ruler 1/4" and cut
1 1/4"	2 1/2", 5", 7 1/2", 10", 12 1/2", 15", 17 1/2", 20"	1", 3 1/2", 6", 8 1/2", 11", 13 1/2", 16", 18 1/2"
1 3/4"	3 1/2", 7", 10 1/2", 14", 17 1/2"	1 1/2", 5", 8 1/2", 12", 15 1/2", 19"
2 1/4"	4 1/2", 9", 13 1/2", 18"	2", 6 1/2", 11", 15 1/2", 20"
2 3/4"	5 1/2", 11", 16 1/2"	2 1/2", 8", 13 1/2", 19"
3 1/4"	6 1/2", 13", 19 1/2"	3", 9 1/2", 16"
3-3/4"	7 1/2", 15"	3 1/2", 11", 18 1/2"

Fig. A

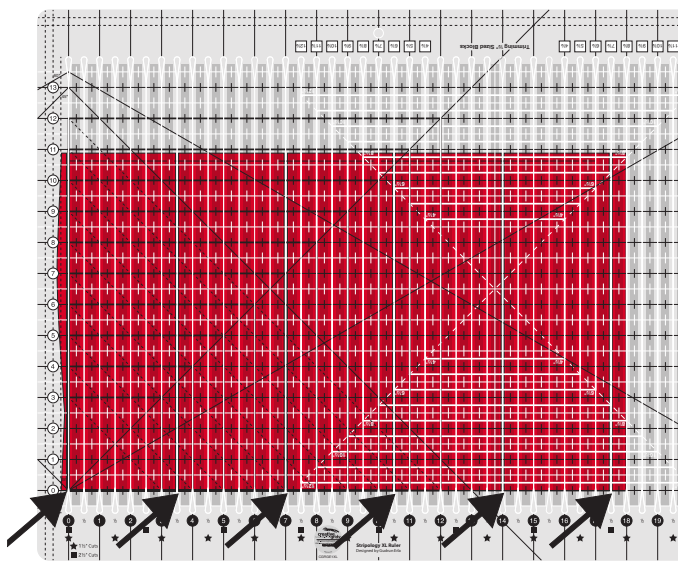


Fig. B

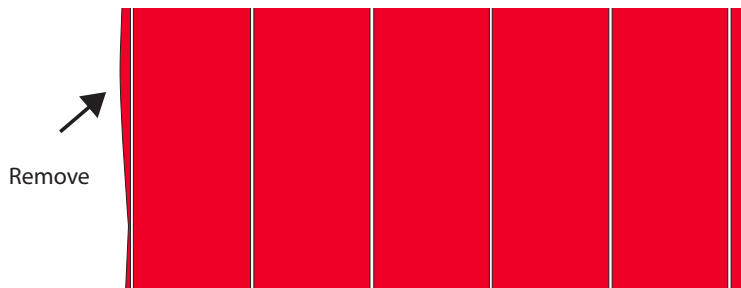


Fig. C




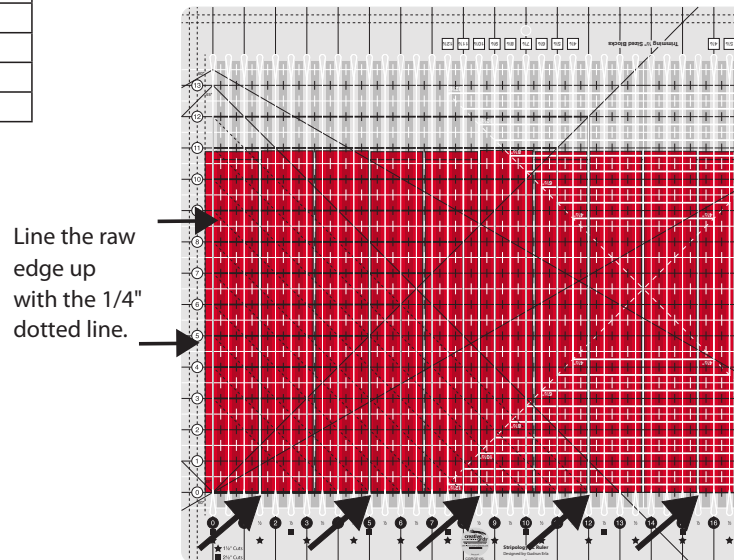


Fig. D

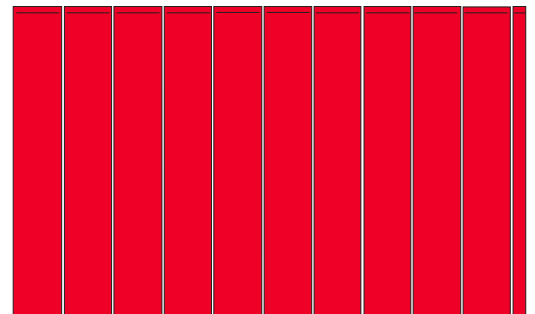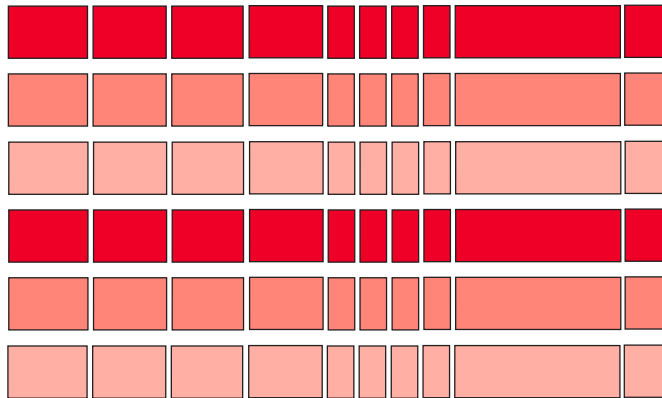



Sub Cutting Your Strips

Once you have all your strips cut for a project, you can use the Stripology XL ruler to sub cut those strips quickly and accurately into squares and rectangles. Save time by layering multiple strips under the ruler and cut them all at the same time.

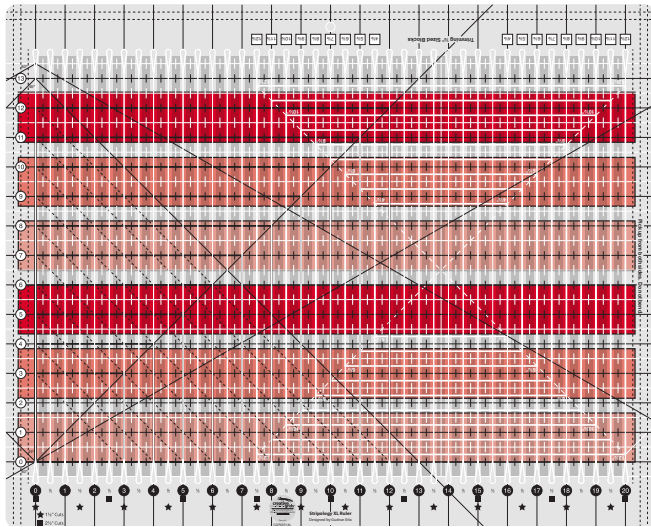

Cutting Pieced Strip Units

The Stripology XL ruler works great for cutting up pieced strip units for any kind of strip pieced project. Lay the ruler on your strip pieced unit and line the horizontal lines on the ruler with the seams of the pieced unit. Make sure the selvages that need to be trimmed off are to the left of the "0" slit on the ruler and make your cuts. If you are more comfortable with cutting, you can even stack your strip pieced units and cut multiple at the same time to save some serious cutting time.

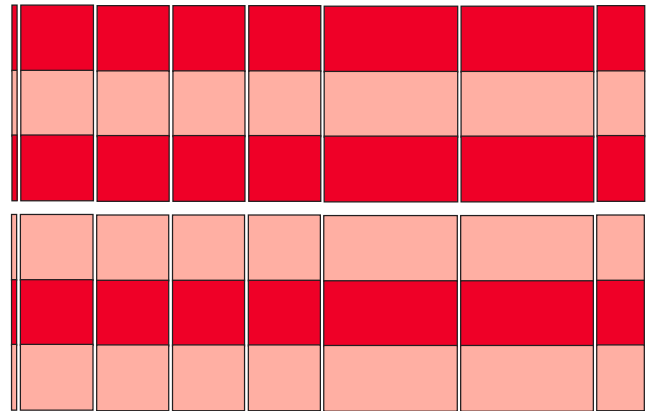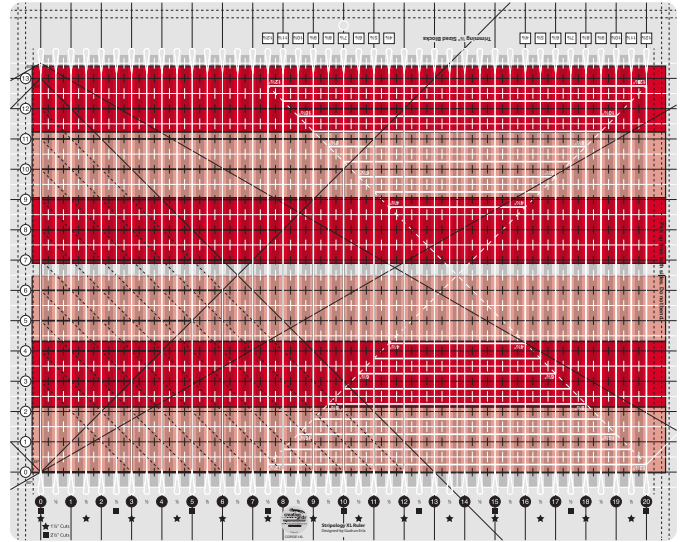

NON-SLIP Stripology XL Ruler cont.


Squaring Up

The Stripology XL has specific lines on it to square up blocks of any size up to 12-1/2" square. The slits on the ruler help to hold the block to be squared in place because it doesn't teeter totter on the seams like many other rulers do when used to square up. Same technique works very well for fussy cutting.


Squaring Up - Whole Inch Sizes

Notice the thick black lines as squares radiating from the bottom left corner of the ruler, going diagonally outward. If you are trimming an 8" block (for example) center the black square that represents the size you are going to cut (8" in this case) on your block, so that the left edges of it extend to the left side of the "0" slit on the ruler and the right edges should extend to the right side of the 8" slit. Use the diagonal and horizontal lines going through the square to line up with the seams of the block if possible (diagonal in this case). Make a cut through the "0" slit and the 8" slit. Rotate the block 90° and repeat the process for the other two sides, lining up the top and bottom of the squares to the top and bottom trimmed edges of the block.

Cutting 8" block is shown.

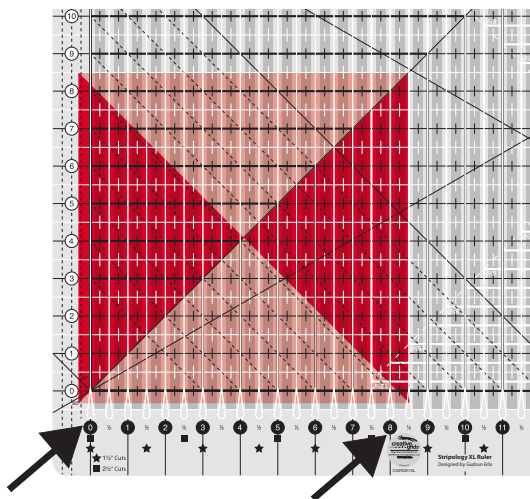

Rotate block.

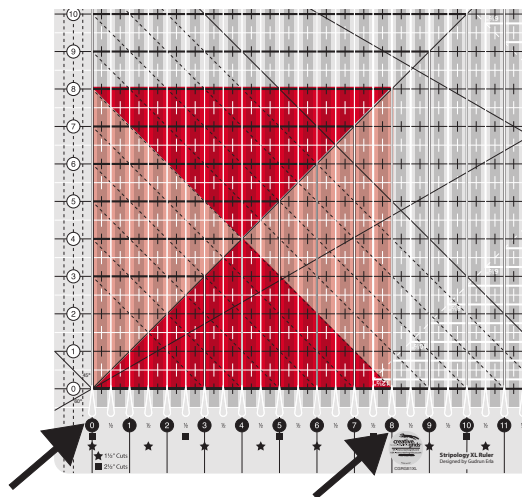


Squaring Up - Half Inch Sizes


Turn the ruler around 180° so that the square numbers are at the bottom. Notice the thick white lines (as squares) radiating outward on the left side of the ruler. If you are trimming an 8 1/2" block (for example) center the white square that represents the size you are going to cut, on your block, so that all the edges of it extend equally past the drawn square. Use the white diagonal and horizontal lines going through the square to line up with the seams of the block. Make a cut through the slits marked 8 1/2" on the bottom (shown with arrows). Rotate the block 90° and repeat the process for the other two sides, lining up the top and bottom ruler squares to the top and bottom trimmed edges of the block.

Same technique works very well for fussy cutting.

Cutting 8-1/2" block is shown.

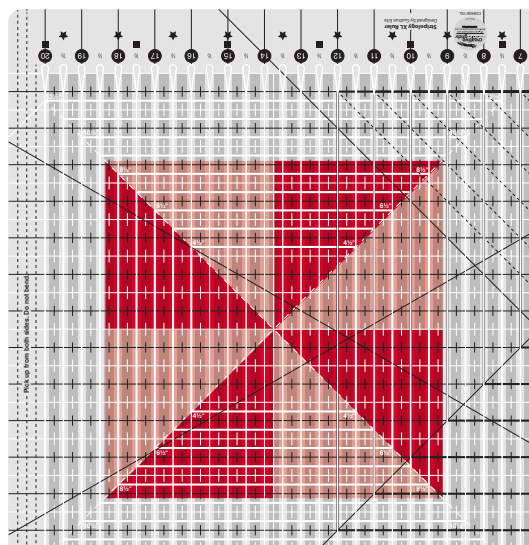

Rotate block.

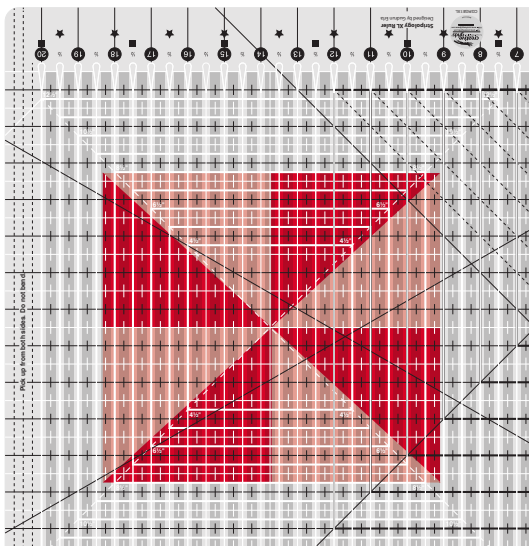


NON-SLIP Stripology XL Ruler cont.

Cutting Diamonds

Use the Stripology XL ruler to cut diamonds from strips quickly and accurately. You can cut 45° or 60° diamonds by using those lines on the ruler. Take your strip and lay it diagonally on your cutting mat. Try to resemble the angle you are going to be cutting. Lay the ruler on top, aligning the 45° or 60° line along the bottom of the strip. Make sure that the selvage is to the left of the "0" slit. Cut through the slits in the same increments of the width of the strip (if you have a 2-1/2" strip, cut through the slits marked with a square ■). Once you can't cut through the whole strip, move the ruler upwards and finish your cutting.


Cutting 60° diamonds is shown.

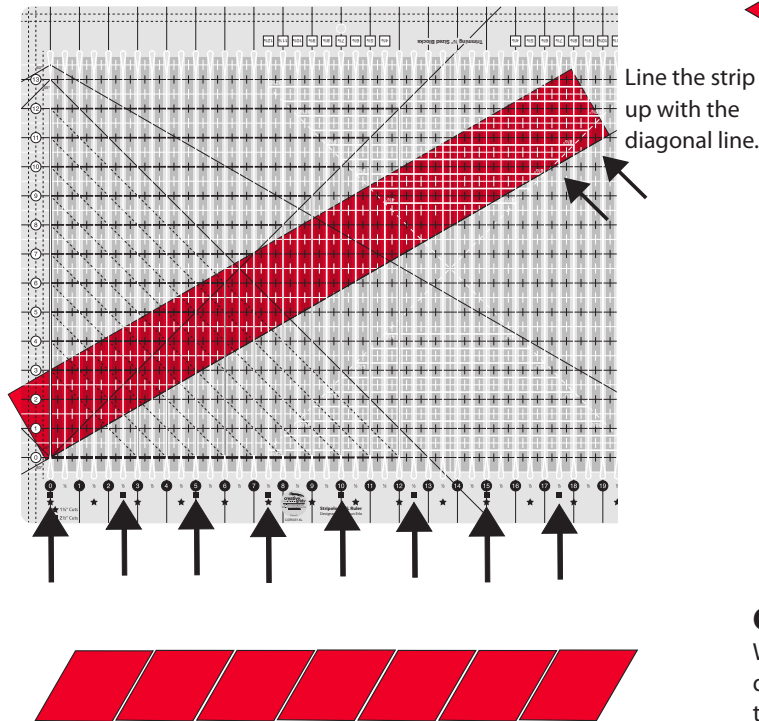

Cutting 60° Triangles


Use the Stripology ruler to cut triangles from strips quickly and accurately. Start with the process of cutting 60° diamonds as described before. Then remove the selvage piece cut off, rotate your ruler counter clockwise until the other 60° line is aligned with the top of the strip and the extended line is even with the raw edge of the fabric (see red arrow). Make your cuts again through the same slits as before.

Cutting 60 degree triangles is shown.

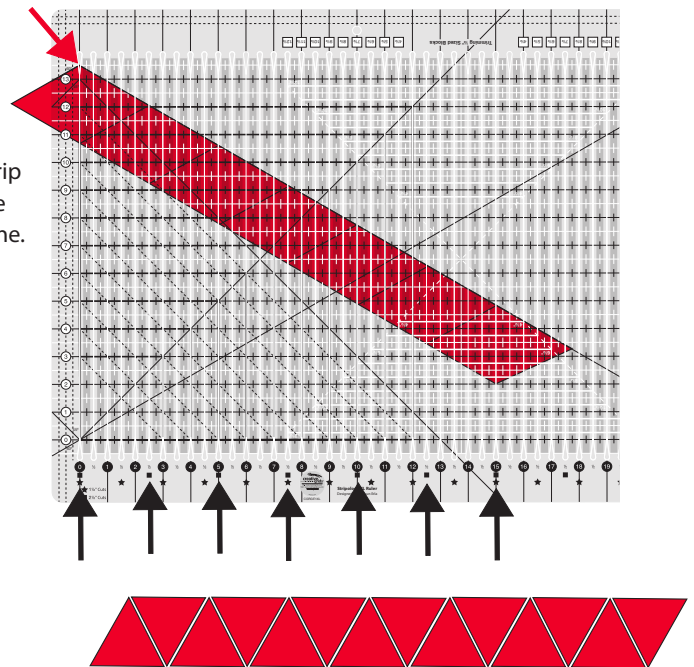

Cutting Apart Squares Into Triangles

When diagonally cutting apart squares into triangles, notice the diagonal lines extending from the "0" slit and the 20" slit, upwards to the outside of the ruler edges (black on left, white on right). Lay your stack of squares on point on your cutting mat, align the diagonal lines with the bottom edges of the square and make a cut through the "0" or the 20" slit. I find it more comfortable to use the 0 side for left handed people and the 20" slit for right handed people.

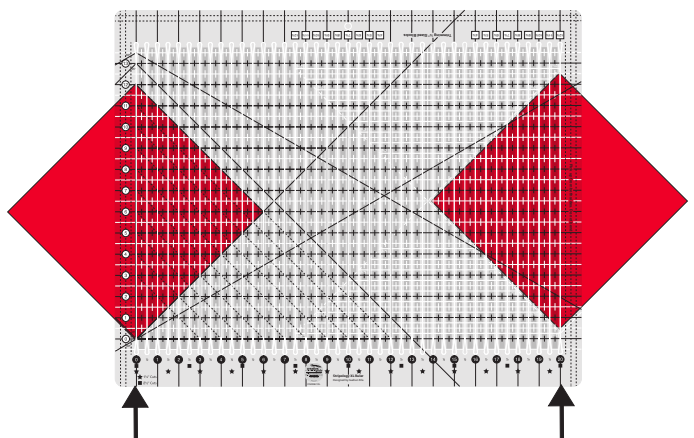

Dotted lines are 1/4" and 1/2" from the edge of the ruler on top and sides. This feature is great for trimming quilts after quilting when needing to trim 1/4" or 1/2" from a point.

